



GE
Lighting



42
kWh/1000h

A
energy class

93
lumens/watt

T8 Triphosphor - Direct
shipment from USA (LFL)

FT8/36W/830/GE/SL1/25 DS USA

33978

Product information

Polylux XLRTM lamps should be the natural choice for all fluorescent lighting applications. The excellent colour reproduction flatters skin tones making people appear more natural, and makes merchandise appear more vibrant and colourful.

Application areas



Retail




Office



Education



Industrial

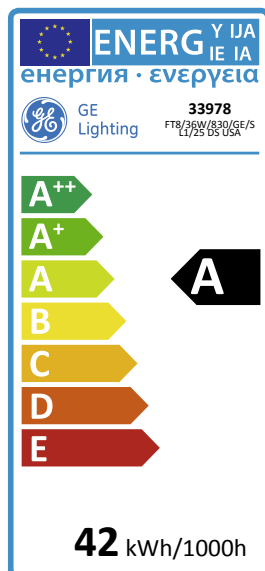

Product data

| | |
|------------------------------------|-----------------------|
| Product Code | 33978 |
| Bulb Shape | Tubular |
| Bulb Finish | Coated |
| Regulatory comment | CE Certified |
| Bulb maximum overall diameter [mm] | 28 |
| Maximum Overall Length [mm] | 1213.6 |
| Cap to Cap Length (Max) [mm] | 1199.4 |
| Gross weight per piece [g] | 214 |
| Mercury Content [mg] | <2,9 mg |
| Product colour | Warm White |
| Brand | General Electric (GE) |
| Cap/Base | G13 |

Performance data

| | |
|--|---------------------|
| Colour Code | 830 |
| Colour (product colour) | Warm White |
| Lumen at 25°C [lm] | 3350 |
| Weighted energy consumption [kWh/1000h] | 42 |
| Rated efficacy 25°C EM preheat | 93 |
| Energy efficiency class (EEC) | A |
| Rated Life [h] | {EM 3-hour} : 15000 |
| Rated median life on electromagnetic (EM / CCG) ballast 18000 on IEC 12-hour cycle | |
| Rated median life on electronic (HF / ECG) ballast on IEC 23000 12-hour cycle | |
| Rated median life on electronic (HF / ECG) ballast on IEC 20000 3-hour cycle | |
| Nominal correlated colour temperature (CCT) [K] | 3000 |
| Nominal lumens [lm] | 3350 |
| Colour Rendering Index (CRI) [Ra] | 80 |

Electrical data

| | |
|--------------------------------------|---------------|
| Rated power [W] | 36.0 |
| Design Lamp ambient temperature [°C] | 25 |
| Starting ambient temperature range | -15°C ...50°C |
| Nominal power [W] | 36 |

Logistic data

| | |
|--------------------------|----------------|
| DUN Code | 10043168339787 |
| EAN Code | 0043168375559 |
| Pack Quantity | 25 |
| Inner pack type | sleeve |
| Outer pack type | outer box |
| Layer quantity EUR | 125 |
| Layer quantity UK | 150 |
| Pallet quantity EUR (PC) | 750 |
| Pallet quantity UK (PC) | 900 |
| Outer case size | 1230x150x145mm |
| Product status | Available |

Downloads & Links

[Go to the catalog site \(HTTP\)](#)