



SENTRON, 3LD switch disconnecter, EMERGENCY-STOP switch, 3-pole, Iu:25 A, Operational power / at AC-23 A at 400 V: 9,5 kW, molded- plastic enclosure for metric threaded joint, rotary operating mechanism, red/yellow

Model		
product brandname		SENTRON
Type of the driving mechanism / motor drive		No
General technical data		
Number of poles		3
Number of poles / Note		N + PE
Type of device		fixed mounting
Operating frequency / maximum	1/h	50
Voltage		
Insulation voltage / rated value	V	690
Surge voltage resistance / rated value	kV	6
Protection class		
Protection class IP / on the front		IP65
Dissipation		
Power loss [W]		
<ul style="list-style-type: none"> <li>for rated value of the current / at AC / in hot operating state / per pole</li> </ul>	W	1.1

Electricity		
Continuous current / rated value	A	25
Short-time current resistance (I <sub>cw</sub> ) / at 690 V / limited to 1 s / rated value	A	640

Main circuit		
<b>Operating frequency</b>		
• initial value	Hz	50
• Full-scale value	Hz	60
<b>Operating power</b>		
• at AC-23 A / at 400 V / rated value	kW	9.5
• at AC-23 A / at 690 V / rated value	kW	9.5
• at AC-3 / at 400 V / rated value	kW	7.5
• at AC-3 / at 690 V / rated value	kW	7.5
<b>Operating voltage</b>		
• at AC / at 50/60 Hz / rated value	V	690

Auxiliary circuit		
<b>Operating voltage / of auxiliary contacts / at AC / maximum</b>	V	500
<b>Continuous current / of the auxiliary contact / rated value</b>	A	10
<b>Insulation voltage / of the auxiliary switch / rated value</b>	V	500

Suitability		
<b>Suitability for use</b>		
• Main switch		Yes
• switch disconnecter		Yes
• EMERGENCY OFF switch		Yes
• safety switch		Yes
• maintenance/repair switch		Yes

Product details		
Product feature / interlock		Yes
Product extension / optional		
• motor drive		No
• Voltage trigger		No

Connections		
<b>Type of electrical connection</b>		
• for auxiliary contacts		connection terminals

Requirements		
<b>Design of the fuse link</b>		

- for short-circuit protection of the main circuit / required
- for short-circuit protection of the auxiliary switch / required

fuse gL/gG: 25 A

fuse gL/gG: 10 A

### Mechanical Design

<b>Height</b>	mm	152
<b>Width</b>	mm	100
<b>Depth</b>	mm	117
<b>Mounting type</b>		
• front mounting with 4-hole attachment		No
• front mounting with central attachment		Yes
• rail mounting		No
<b>Net weight</b>	g	446

### Environmental conditions

<b>Ambient temperature</b>		
• during operation / minimum	°C	-25
• during operation / maximum	°C	55

### Certificates

<b>Equipment marking</b>		
• acc. to DIN EN 61346-2		S
• acc. to DIN EN 81346-2		SF

### General Product Approval

### Declaration of Conformity



[sonstig](#)



<b>Test Certificates</b>	<b>Shipping Approval</b>	<b>other</b>
--------------------------	--------------------------	--------------

[sonstig](#)



LRS

[Umweltbestätigung](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**



<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3LD2164-0TB53>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3LD2164-0TB53/all>

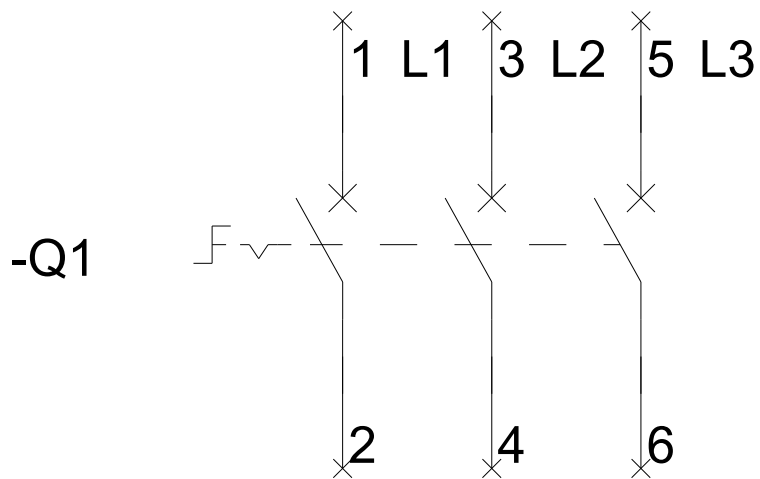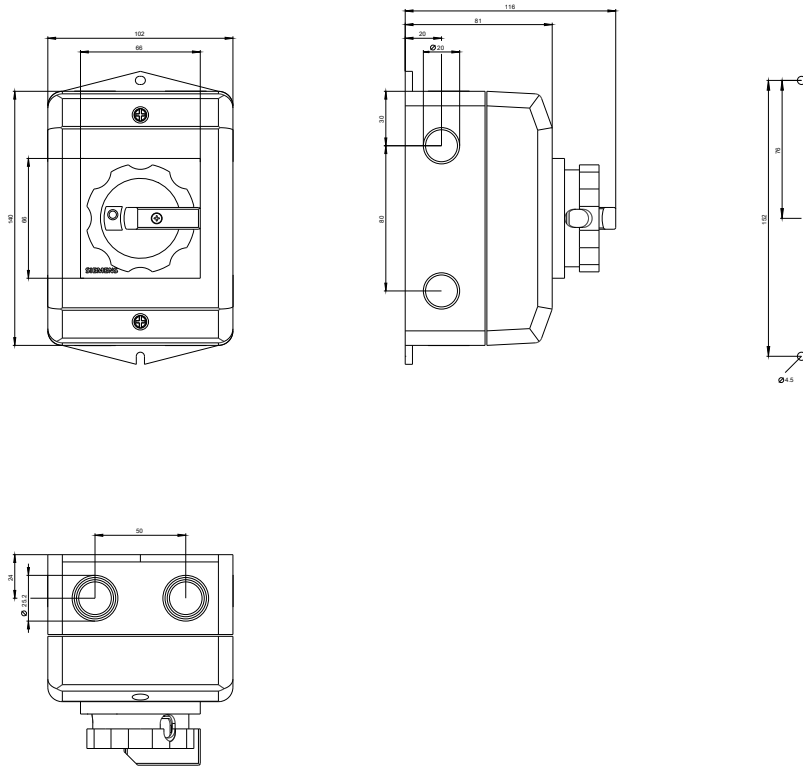

**last modified:**

10/14/2016