



GE
Lighting

22
kWh/1000h

A
energy class

75
lumens/watt

T8 Triphosphor - Direct shipment from USA (LFL)

FT8/18W/830/GE/SL1/25 DS USA

33973



Product information

Polylux XLRTM lamps should be the natural choice for all fluorescent lighting applications. The excellent colour reproduction flatters skin tones making people appear more natural, and makes merchandise appear more vibrant and colourful.

Application areas



Retail




Office



Education



Industrial

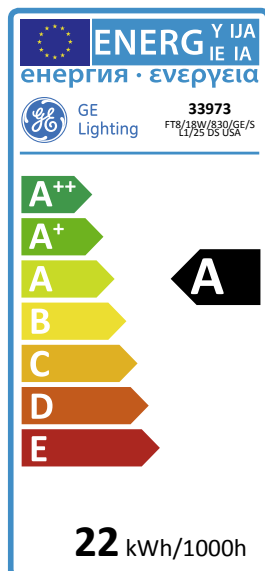

Product data

Product Code	33973
Bulb Shape	Tubular
Bulb Finish	Coated
Regulatory comment	CE Certified
Bulb maximum overall diameter [mm]	28
Maximum Overall Length [mm]	604
Cap to Cap Length (Max) [mm]	589.8
Gross weight per piece [g]	116
Mercury Content [mg]	<2,9 mg
Product colour	Warm White
Brand	General Electric (GE)
Cap/Base	G13

Performance data

Colour Code	830
Colour (product colour)	Warm White
Lumen at 25°C [lm]	1350
Weighted energy consumption [kWh/1000h]	22
Rated efficacy 25°C EM preheat	75
Energy efficiency class (EEC)	A
Rated Life [h]	{EM 3-hour} : 15000
Rated median life on electromagnetic (EM / CCG) ballast 18000 on IEC 12-hour cycle	
Rated median life on electronic (HF / ECG) ballast on IEC 23000 12-hour cycle	
Rated median life on electronic (HF / ECG) ballast on IEC 20000 3-hour cycle	
Nominal correlated colour temperature (CCT) [K]	3000
Nominal lumens [lm]	1350
Colour Rendering Index (CRI) [Ra]	80

Electrical data

Rated power [W]	18.0
Design Lamp ambient temperature [°C]	25
Starting ambient temperature range	-15°C ...50°C
Nominal power [W]	18

Logistic data

DUN Code	10043168339732
EAN Code	0043168375528
Pack Quantity	25
Inner pack type	sleeve
Outer pack type	outer box
Layer quantity EUR	250
Layer quantity UK	300
Pallet quantity EUR (PC)	1500
Pallet quantity UK (PC)	1800
Outer case size	630x150x145mm
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)