SIEMENS

Data sheet 3RU2116-1EB0



Overload relay 2.8...4.0 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

| product brand name | SIRIUS |
|---|------------------------|
| product designation | thermal overload relay |
| product type designation | 3RU2 |
| General technical data | |
| size of overload relay | S00 |
| size of contactor can be combined company-specific | S00 |
| power loss [W] for rated value of the current at AC in hot operating state | 5.7 W |
| • per pole | 1.9 W |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for protective separation in networks with grounded star point | |
| between auxiliary and auxiliary circuit | 440 V |
| between auxiliary and auxiliary circuit | 440 V |
| between main and auxiliary circuit | 440 V |
| between main and auxiliary circuit | 440 V |
| shock resistance according to IEC 60068-2-27 | 8g / 11 ms |
| type of protection according to ATEX directive 2014/34/EU | Ex II (2) GD |
| certificate of suitability according to ATEX directive 2014/34/EU | DMT 98 ATEX G 001 |
| reference code according to IEC 81346-2 | F |
| Substance Prohibitance (Date) | 10/01/2009 |
| SVHC substance name | Blei - 7439-92-1 |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| during operation | -40 +70 °C |
| during storage | -55 +80 °C |
| during transport | -55 +80 °C |
| temperature compensation | -40 +60 °C |
| relative humidity during operation | 10 95 % |
| Main circuit | |
| number of poles for main current circuit | 3 |
| adjustable current response value current of the current- dependent overload release | 2.8 4 A |
| operating voltage | |
| • rated value | 690 V |
| at AC-3e rated value maximum | 690 V |
| operating frequency rated value | 50 60 Hz |
| operational current rated value | 4 A |
| operational current at AC-3e at 400 V rated value | 4 A |

| operating power | |
|---|--|
| • at AC-3 | |
| — at 400 V rated value | 1.5 kW |
| — at 500 V rated value | 2.2 kW |
| — at 690 V rated value | 3 kW |
| • at AC-3e | |
| — at 400 V rated value | 1.5 kW |
| — at 500 V rated value | 2.2 kW |
| — at 690 V rated value | 3 kW |
| Auxiliary circuit | |
| design of the auxiliary switch | integrated |
| number of NC contacts for auxiliary contacts | 1 |
| • note | for contactor disconnection |
| number of NO contacts for auxiliary contacts | 1 |
| • note | for message "Tripped" |
| number of CO contacts for auxiliary contacts | 0 |
| operational current of auxiliary contacts at AC-15 | |
| • at 24 V | 3 A |
| • at 110 V | 3 A |
| • at 120 V | 3 A |
| • at 125 V | 3 A |
| • at 230 V | 2 A |
| • at 400 V | 1 A |
| • at 690 V | 0.75 A |
| operational current of auxiliary contacts at DC-13 | 6.1671 |
| • at 24 V | 2 A |
| • at 60 V | 0.3 A |
| • at 110 V | 0.22 A |
| • at 125 V | 0.22 A |
| • at 220 V | 0.11 A |
| contact rating of auxiliary contacts according to UL | B600 / R300 |
| Protective and monitoring functions | B000 / 1000 |
| | CLASS 10 |
| Trip (1988 | 0LA00 10 |
| trip class | thermal |
| design of the overload release | thermal |
| design of the overload release UL/CSA ratings | thermal |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor | |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value | 4 A |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value | |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection | 4 A |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link | 4 A 4 A |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required | 4 A |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions | 4 A 4 A fuse gG: 6 A, quick: 10 A |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position | 4 A 4 A fuse gG: 6 A, quick: 10 A |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm No |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm No screw-type terminals screw-type terminals |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm No |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm No screw-type terminals screw-type terminals |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm No screw-type terminals screw-type terminals |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm No screw-type terminals screw-type terminals |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm No screw-type terminals screw-type terminals Top and bottom |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded | fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm No screw-type terminals screw-type terminals Top and bottom 2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm² |
| design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing | 4 A 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm 45 mm 70 mm No screw-type terminals screw-type terminals Top and bottom 2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) |

| for auxiliary contacts | |
|---|-------------------------------------|
| — solid or stranded | 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) |
| finely stranded with core end processing | 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) |
| for AWG cables for auxiliary contacts | 2x (20 16), 2x (18 14) |
| tightening torque | |
| for main contacts with screw-type terminals | 0.8 1.2 N·m |
| for auxiliary contacts with screw-type terminals | 0.8 1.2 N·m |
| design of screwdriver shaft | Diameter 5 6 mm |
| size of the screwdriver tip | Pozidriv PZ 2 |
| design of the thread of the connection screw | |
| • for main contacts | M3 |
| of the auxiliary and control contacts | M3 |
| | |
| Safety related data | |
| | 50 FIT |
| Safety related data failure rate [FIT] with low demand rate according to SN | 50 FIT 2 280 a |
| Safety related data failure rate [FIT] with low demand rate according to SN 31920 | |
| Safety related data failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate | |
| Safety related data failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to | 2 280 a |
| Safety related data failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to IEC 61508 | 2 280 a |
| Safety related data failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to IEC 61508 Electrical Safety | 2 280 a 20 a |
| Safety related data failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to IEC 61508 Electrical Safety protection class IP on the front according to IEC 60529 | 2 280 a 20 a IP20 |
| failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to IEC 61508 Electrical Safety protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529 | 2 280 a 20 a IP20 |

General Product Approval







Confirmation





For use in hazardous locations

Test Certificates

Marine / Shipping





Type Test Certificates/Test Report

Special Test Certificate





Marine / Shipping





185







Miscellaneous

other

other

Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1EB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-1EB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1EB0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2116-1EB0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1EB0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1EB0&objecttype=14&gridview=view1

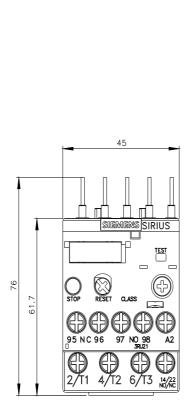

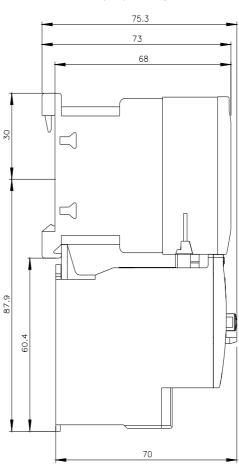

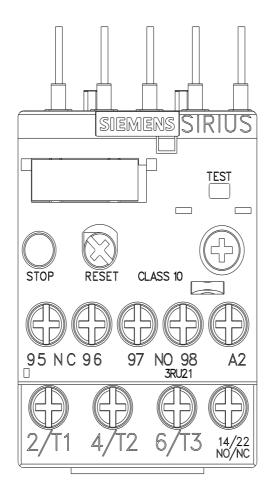

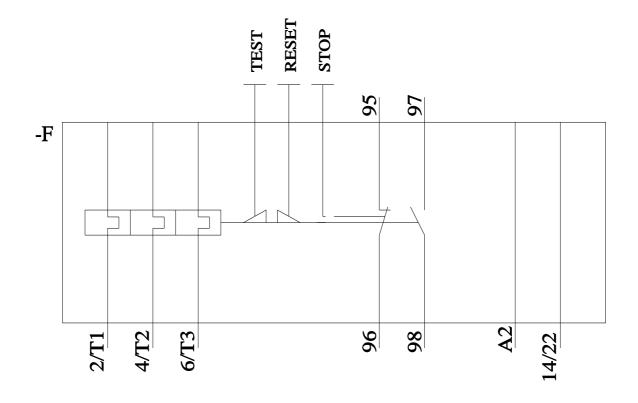

last modified: 9/5/2023 🖸