SIEMENS

Data sheet 3RU2126-4EB0



Overload relay 27...32 A Thermal For motor protection Size S0, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	SO
size of contactor can be combined company-specific	S0
power loss [W] for rated value of the current at AC in hot operating state	9.6 W
• per pole	3.2 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	440 V
 between auxiliary and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
between main and auxiliary circuit	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Blei - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-40 +70 °C
during storage	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	27 32 A
operating voltage	
• rated value	690 V
• at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	32 A
operational current at AC-3e at 400 V rated value	32 A

operating power	
• at AC-3	
— at 400 V rated value	15 kW
— at 500 V rated value	18.5 kW
— at 690 V rated value	30 kW
• at AC-3e	
— at 400 V rated value	15 kW
— at 500 V rated value	18.5 kW
— at 690 V rated value	30 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1 A
• at 690 V	0.75 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.3 A
• at 110 V	0.22 A
• at 125 V	0.22 A
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	B000 / 1000
	CLASS 10
	CLAGG 10
trip class	thermal
design of the overload release	thermal
design of the overload release UL/CSA ratings	thermal
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor	
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	32 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection	32 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link	32 A 32 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required	32 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	32 A 32 A fuse gG: 6 A, quick: 10 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	32 A 32 A fuse gG: 6 A, quick: 10 A
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals	32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	32 A 32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current	32 A 32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit	32 A 32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	32 A 32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts	32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals Top and bottom
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded	32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals Top and bottom 2x (1 2.5 mm²), 2x (2.5 10 mm²)
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing	32 A 32 A 32 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals Top and bottom 2x (1 2.5 mm²), 2x (2.5 10 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²

 for auxiliary contacts 	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 for AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14)
tightening torque	
 for main contacts with screw-type terminals 	2 2.5 N·m
 for auxiliary contacts with screw-type terminals 	0.8 1.2 N·m
design of screwdriver shaft	Diameter 5 6 mm
size of the screwdriver tip	Pozidriv PZ 2
design of the thread of the connection screw	
• for main contacts	M4
 of the auxiliary and control contacts 	M3
of the advinary and control contacts	
Safety related data	
	50 FIT
Safety related data failure rate [FIT] with low demand rate according to SN	
Safety related data failure rate [FIT] with low demand rate according to SN 31920	50 FIT
Safety related data failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate	50 FIT
Failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to	50 FIT 2 280 a
Safety related data failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to IEC 61508	50 FIT 2 280 a
Safety related data failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to IEC 61508 Electrical Safety	50 FIT 2 280 a 20 a
Safety related data failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to IEC 61508 Electrical Safety protection class IP on the front according to IEC 60529	50 FIT 2 280 a 20 a
failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to IEC 61508 Electrical Safety protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529	50 FIT 2 280 a 20 a

General Product Approval





Confirmation







For use in hazardous locations

Test Certificates

Marine / Shipping







Type Test Certificates/Test Report

Special Test Certificate





Marine / Shipping





LRS







Miscellaneous

other

other

Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-4EB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2126-4EB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4EB0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2126-4EB0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4EB0/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2126-4EB0&objecttype=14&gridview=view1

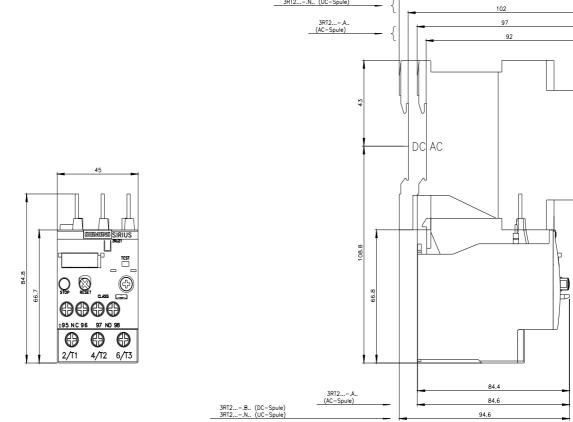

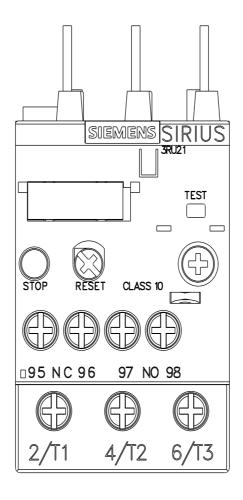

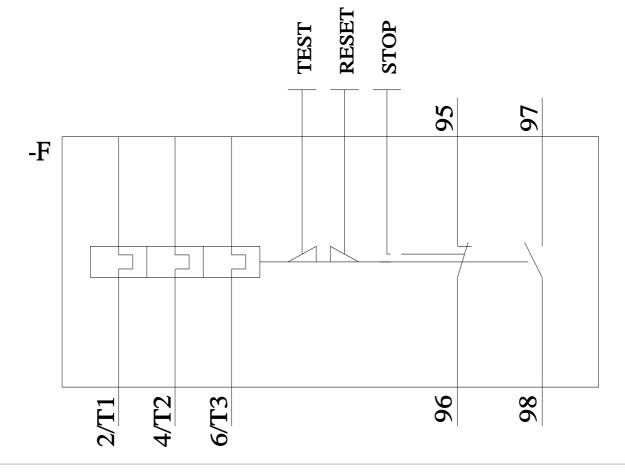

last modified: 9/5/2023 🖸