SIEMENS

Data sheet 3RU2126-4PB0



Overload relay 30...36 A Thermal For motor protection Size S0, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S0
size of contactor can be combined company-specific	S0
power loss [W] for rated value of the current at AC in hot operating state	9.6 W
• per pole	3.2 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	440 V
 between auxiliary and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
between main and auxiliary circuit	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Blei - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-40 +70 °C
during storage	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	30 36 A
operating voltage	
• rated value	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	36 A
operational current at AC-3e at 400 V rated value	36 A

operating power	
• at AC-3	
— at 400 V rated value	18.5 kW
— at 500 V rated value	22 kW
— at 690 V rated value	30 kW
• at AC-3e	
— at 400 V rated value	18.5 kW
— at 500 V rated value	22 kW
— at 690 V rated value	30 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1 A
• at 690 V	0.75 A
operational current of auxiliary contacts at DC-13	0.10 A
• at 24 V	2 A
• at 60 V	0.3 A
	0.22 A
• at 110 V	0.22 A 0.22 A
• at 125 V	
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL Protective and monitoring functions	B600 / R300
	CLACC 40
trip class design of the overload release	CLASS 10
design of the overload release	thermal
UL/CSA ratings	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	00 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	36 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	36 A 36 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link	36 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	36 A fuse gG: 6 A, quick: 10 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	36 A fuse gG: 6 A, quick: 10 A any
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	36 A fuse gG: 6 A, quick: 10 A any Contactor mounting
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	36 A fuse gG: 6 A, quick: 10 A any
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	36 A fuse gG: 6 A, quick: 10 A any Contactor mounting
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals Top and bottom
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals Top and bottom 2x (1 2.5 mm²), 2x (2.5 10 mm²)
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals Top and bottom 2x (1 2.5 mm²), 2x (2.5 10 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²

 for auxiliary contacts 	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 for AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14)
tightening torque	
 for main contacts with screw-type terminals 	2 2.5 N·m
 for auxiliary contacts with screw-type terminals 	0.8 1.2 N·m
design of screwdriver shaft	Diameter 5 6 mm
size of the screwdriver tip	Pozidriv PZ 2
design of the thread of the connection screw	
• for main contacts	M4
 of the auxiliary and control contacts 	M3
Safety related data	
failure rate [FIT] with low demand rate according to SN 31920	50 FIT
MTTF with high demand rate	2 280 a
IEC 61508	
T1 value for proof test interval or service life according to IEC 61508	20 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Display	
Display display version for switching status	Slide switch

UK

General Product Approval





Confirmation





For use in hazardous locations

Test Certificates

Marine / Shipping





Type Test Certificates/Test Report

Special Test Certificate





Marine / Shipping





105







Miscellaneous

other

other

Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-4PB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2126-4PB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4PB0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2126-4PB0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4PB0/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2126-4PB0&objecttype=14&gridview=view1

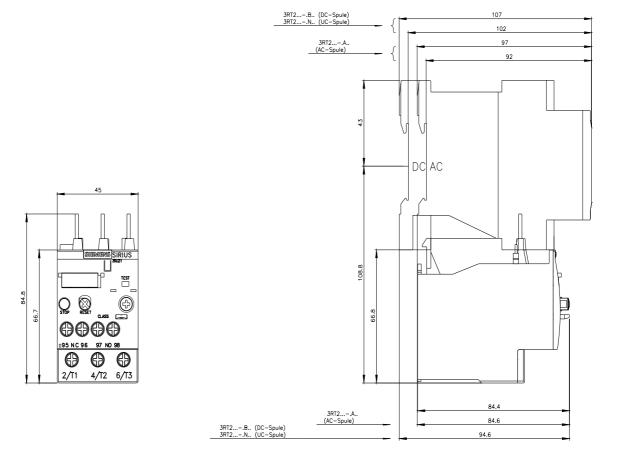

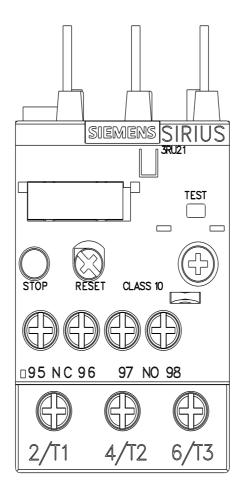

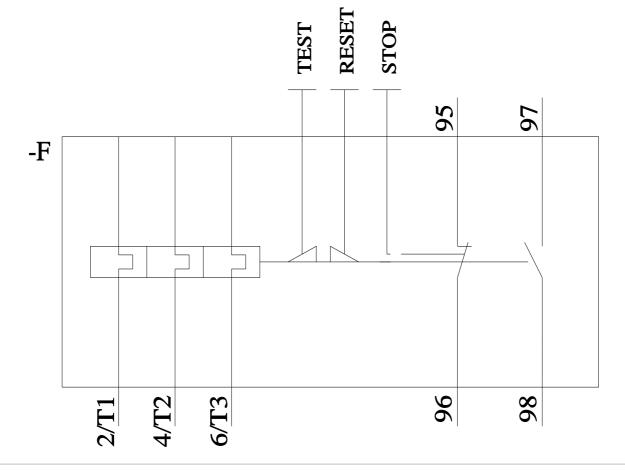

last modified: 9/5/2023 🖸