


Installation accessories



3.1

CABLE GLANDS WITH DEVICE TO PREVENT ANY UNSCREWING

UNION Series




Dimensions mm	ø fixing hole	cable size ø	spanner size	thread length	SPANNER COUPLER (N.M)		WITH NUT			
					nut	seal	Standard RAL 7035 grey	Heavy duty RAL 7004 grey		
PG7	13	3 - 6	15	9,5	2,5	2,5	805.3340	50/600	805.3350	50/600
PG9	16	4 - 8	19	9,5	4	2,5	805.3341	50/600	805.3351	50/600
PG11	19	5 - 10	22	10	5,5	5	805.3342	25/500	805.3352	25/500
PG13,5	21	7 - 12	24	12	6	5	805.3343	25/500	805.3353	25/500
PG16	23	10 - 14	27	12	6	5,5	805.3344	25/300	805.3354	25/300
PG21	29	13 - 18	33	14	9	7	805.3345	25/400	805.3355	25/400
PG29	37,5	18 - 25	42	15	14	10	805.3346	25/350	805.3356	25/350
PG36	47,5	22 - 32	53	17,5	15	12,5	805.3347	10/140	805.3357	10/140
PG42	54,5	30 - 38	60	19	15	12,5	805.3348	10/100	805.3358	10/100
PG48	60	34 - 44	68	20	15	12,5	805.3349	10/100	805.3359	10/100
M12x1,5	12	3 - 6	15	9,5	2,5	2,5	805.5412	50/600	805.5512	50/600
M16x1,5	16	4 - 8	19	9,5	4	2,5	805.5416	50/600	805.5516	50/600
M20x1,5	20	7 - 12	24	12	6	5	805.5420	25/500	805.5520	25/500
M25x1,5	25	13 - 18	33	14	9	5,5	805.5425	25/400	805.5525	25/400
M32x1,5	32	18 - 25	42	15	14	7	805.5432	25/350	805.5532	25/350
M40x1,5	40	22 - 32	53	17,5	15	11,5	805.5440	10/140	805.5540	10/140
M50x1,5	50	30 - 38	60	19	15	11,5	805.5450	10/100	805.5550	10/100
M63x1,5	63	34 - 44	68	14	15	11,5	805.5463	10/100	805.5563	10/100
1/4"	13	3 - 6	15	9,5	2,5	2,5	805.7340	50/600	805.7350	50/600
3/8"	16	4 - 8	19	9,5	4	2,5	805.7341	50/600	805.7351	50/600
1/2"	21	7 - 12	24	12	6	5	805.7343	25/500	805.7353	25/500
5/8"	23	10 - 14	27	12	6	5,5	805.7344	25/300	805.7354	25/300
3/4"	29	13 - 18	33	14	9	7	805.7345	25/400	805.7355	25/400
1"	37,5	18 - 25	42	15	14	10	805.7346	25/350	805.7356	25/350
1.1/8"	37,5	18 - 25	42	15	14	10	805.7347	10/140	805.7357	10/140
1.1/2"	47,5	22 - 32	53	17,5	15	12,5	805.7348	10/140	805.7358	10/140
2"	60	34 - 44	68	20	15	12,5	805.7349	10/100	805.7359	10/100

(*) Cable glands are provided without gasket.
 (**) Fixing type A (metric HD).
 (*) STANDARD version: IP66
 - HEAVY DUTY version IP66 or IP68 (1 bar) if installed with corresponding seal.

WITHOUT NUT	WITH DIAPHRAM AND NUT	WITH DIAPHRAM WITHOUT NUT	LOCK-NUTS	SEALS
Standard RAL 7035 grey	Standard RAL 7035 grey	Standard RAL 7035 grey	Standard RAL 7035 grey	Heavy duty RAL 7004 grey
805.3340.0	805.3340.1	805.3340.2	805.3360	805.3370
805.3341.0	805.3341.1	805.3341.2	805.3361	805.3371
805.3342.0	805.3342.1	805.3342.2	805.3362	805.3372
805.3343.0	805.3343.1	805.3343.2	805.3363	805.3373
805.3344.0	805.3344.1	805.3344.2	805.3364	805.3374
805.3345.0	805.3345.1	805.3345.2	805.3365	805.3375
805.3346.0	805.3346.1	805.3346.2	805.3366	805.3376
805.3347.0	805.3347.1	805.3347.2	805.3367	805.3377
805.3348.0	805.3348.1	805.3348.2	805.3368	805.3378
805.3349.0	805.3349.1	805.3349.2	805.3369	805.3379
805.5412.0	805.5412.1	805.5412.2	805.5612	805.5712
805.5416.0	805.5416.1	805.5416.2	805.5616	805.5716
805.5420.0	805.5420.1	805.5420.2	805.5620	805.5720
805.5425.0	805.5425.1	805.5425.2	805.5625	805.5725
805.5432.0	805.5432.1	805.5432.2	805.5632	805.5732
805.5440.0	805.5440.1	805.5440.2	805.5640	805.5740
805.5450.0	805.5450.1	805.5450.2	805.5650	805.5750
805.5463.0	805.5463.1	805.5463.2	805.5663	805.5763

Cable gland table: METRIC/PG/GAS

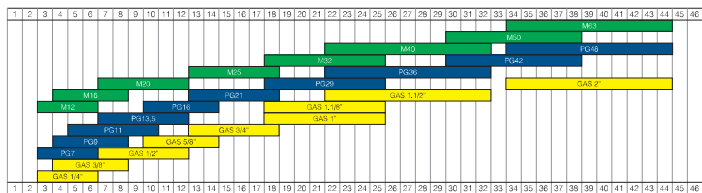

1
2
3
4
ACCESSORIES

