




ALFRA TGT-HOLE SAWS – SHORT TYPE

Made in Germany by ALFRA

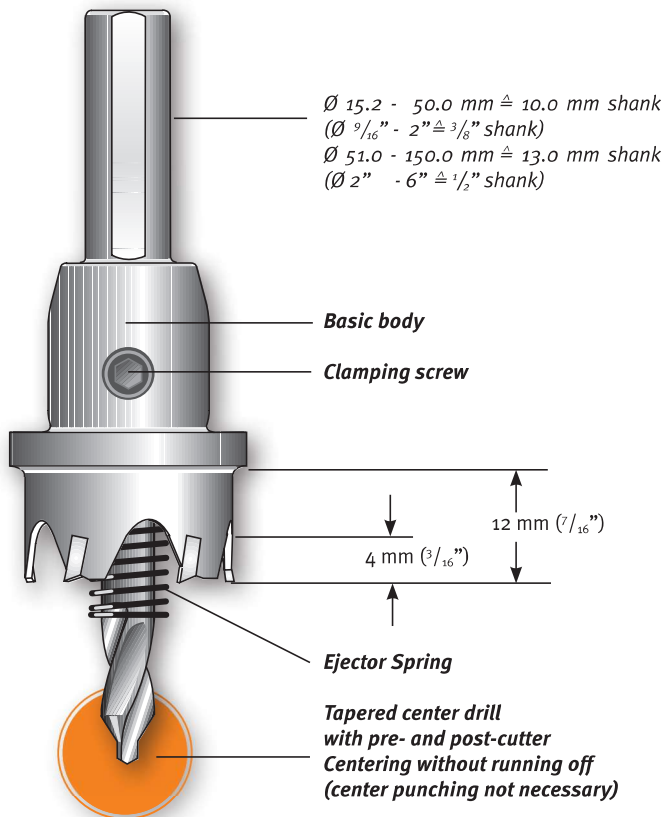

The application area of TCT Hole Saws differs from HSS-Bi-Metal Hole Saws. With ALFRA TCT Hole Saws, suitable to economically process stainless steel up to 2 mm (1/16"), unalloyed steels up to 4 mm (3/16"), plastics, PVC, aluminium, zinc, gypsum plaster boards and lightweight building boards, as well as asbestos. Do not use automatic feed, when working with pillar drilling machines. For the use on portable- and pillar drilling machines. Do not use automatic feed, when working with pillar drilling machines.

Features:

- High concentric running exactness through solid construction.
- CAD-optimized cutting angles with specially ground section ensures high cutting capacity and long tool life.
- Quick removal of drilled core through ejector spring for all hole saws up to 150 mm (5-29/32") \varnothing .
- Carbide tipping enables repeated re-grinding.
- ALFRA hole saws are repairable. In the event of a tooth breaking, it can easily be replaced and resharpened.
- Exchangeable center pin.
- Use of MT tool holders from $\varnothing 31 \text{ mm}$ (1-7/32").
- For use on hand drilling machines (recommended up to max. $\varnothing 40 \text{ mm}$; 1-9/16") or stationary machines.

Tips:

- At thicker materials: cut 2-3 mm per cutting process, remove chips afterwards.
- When cutting metals, a high-grade cutting oil should be used. Exception: Do not use cutting oil when using cast iron, use paraffin instead of oil when cutting aluminium.
- **Keep in mind: Always wear safety goggles.**

Another special technical feature:

From $\varnothing 15.2 \text{ mm}$ (3/16") to 30.0 mm (1 1/8"), the hole saw is made of one piece.

From $\varnothing 31.0 \text{ mm}$ (1-3/16") we use specially hardened tool holders to compensate for the torsional power in case of heavy operation, which avoids early shearing off of the tool holder shank.

In terms of construction not comparable with any other make.





ALFRA TGT-HOLE SAWS – SHORT TYPE



Made in Germany by ALFRA

Ø mm	Ø Inches	No. of teeth	Prod.-No. mm
Ø 15.2	15	4	0600152
Ø 16.0	5/8"	4	0600160
Ø 17.0		4	0600170
Ø 18.0	11/16"	4	0600180
Ø 18.6		4	0600186
Ø 19.0	3/4"	4	0600190
Ø 20.0		5	0600200
Ø 20.4		5	0600204
Ø 21.0	13/16"	5	0600210
Ø 22.0		5	0600220
Ø 22.5		5	0600225
Ø 23.0	7/8"	5	0600230
Ø 24.0	15/16"	5	0600240
Ø 25.0		5	0600250
Ø 26.0	1"	5	0600260
Ø 27.0	1-1/16"	5	0600270
Ø 28.0		5	0600280
Ø 28.3		5	0600283
Ø 29.0	1-1/8"	5	0600290
Ø 30.0	1-3/16"	5	0600300
Ø 31.0		6	0600310
Ø 32.0	1-1/4"	6	0600320
Ø 33.0		6	0600330
Ø 34.0	1-5/16"	6	0600340
Ø 35.0	1-3/8"	6	0600350
Ø 36.0		6	0600360
Ø 37.0	1-7/16"	7	0600370
Ø 38.0		7	0600380
Ø 39.0	1-1/2"	7	0600390
Ø 40.0	1-9/16"	7	0600400
Ø 41.0		8	0600410
Ø 42.0	1-5/8"	8	0600420
Ø 43.0	1-11/16"	8	0600430
Ø 44.0		8	0600440
Ø 45.0	1-3/4"	8	0600450
Ø 46.0		8	0600460
Ø 47.0	1-13/16"	9	0600470
Ø 48.0	1-7/8"	9	0600480
Ø 49.0		9	0600490
Ø 50.0	1-15/16"	9	0600500
Ø 51.0	2"	9	0600510
Ø 52.0		10	0600520
Ø 53.0	2-1/16"	10	0600530
Ø 54.0	2-1/8"	10	0600540
Ø 55.0		10	0600550
Ø 56.0	2-3/16"	10	0600560
Ø 57.0	2-1/4"	10	0600570
Ø 58.0		10	0600580
Ø 59.0	2-5/16"	10	0600590
Ø 60.0	2-3/8"	10	0600600
Ø 61.0		11	0600610
Ø 62.0	2-7/16"	11	0600620
Ø 63.0		11	0600630
Ø 64.0	2-1/2"	11	0600640
Ø 65.0		11	0600650
Ø 66.0	2-9/16"	12	0600660
Ø 67.0	2-5/8"	12	0600670
Ø 68.0		12	0600680
Ø 69.0	2-11/16"	12	0600690
Ø 70.0	2-3/4"	12	0600700
Ø 71.0		12	0600710
Ø 72.0	2-13/16"	13	0600720
Ø 73.0	2-7/8"	13	0600730
Ø 74.0	2-15/16"	13	0600740
Ø 75.0		13	0600750
Ø 76.0	3"	13	0600760

Ø mm	Ø Inches	No. of teeth	Prod.-No. mm
Ø 77.0		13	0600770
Ø 78.0	3-1/16"	14	0600780
Ø 79.0	3-1/8"	14	0600790
Ø 80.0		14	0600800
Ø 81.0	3-3/16"	14	0600810
Ø 82.0		14	0600820
Ø 83.0	3-1/4"	14	0600830
Ø 84.0	3-5/16"	15	0600840
Ø 85.0		15	0600850
Ø 86.0	3-3/8"	15	0600860
Ø 87.0	3-7/16"	15	0600870
Ø 88.0		15	0600880
Ø 89.0	3-1/2"	16	0600890
Ø 90.0	3-9/16"	16	0600900
Ø 91.0		16	0600910
Ø 92.0	3-5/8"	16	0600920
Ø 93.0		16	0600930
Ø 94.0	3-11/16"	16	0600940
Ø 95.0	3-3/4"	17	0600950
Ø 96.0		17	0600960
Ø 97.0	3-13/16"	17	0600970
Ø 98.0	3-7/8"	17	0600980
Ø 99.0		17	0600990
Ø 100.0	3-15/16"	17	0601000
Ø 105.0	4"	18	0601050
Ø 110.0		18	0601100
Ø 115.0	4-1/2"	20	0601150
Ø 120.0		20	0601200
Ø 125.0		20	0601250
Ø 130.0	5"	20	0601300
Ø 135.0		24	0601350
Ø 140.0	5-1/2"	24	0601400
Ø 145.0		24	0601450
Ø 150.0		24	0601500

HSS-Spare Drill with tapered center tip

from Ø 15.2 - 100.0	Ø 6x50 mm	0602650
from Ø 101.0 - 150.0	Ø 8x50 mm	0602850

MT Arbors

MT-2 (Ø 31.0 - 100.0 mm)	0734002
MT-3 (Ø 31.0 - 150.0 mm)	0734003

SDS Arbor

SDS arbor shank (for use with Ø 31.0 - 100.0 mm)	060sds6
---	---------

Spare Ejector

from Ø 15.2 - 150.0	Ø 6 mm	0602006
---------------------	--------	---------

Coolant ALFRA

ALFRA BIO 2000 For mild steel DIN S233, 405 ml	21010
ALFRA 3000 For chromium nickel steel 520 ml	21030
ALFRA 4000 For titanium and manganese-carbon steels 300 ml	21040



Prod.-No. 0600001

Set Metric

Set Metric	Prod.-No. 0600001
------------	----------------------

Contents:
1 each of Ø 16/20/25/32/40 mm
2 Allen Keys



Prod.-No. 21010


Prod.-No. 21030

Prod.-No. 21040



ALFRA TGT-HOLE SAWS – LONG TYPE

Made in Germany by ALFRA

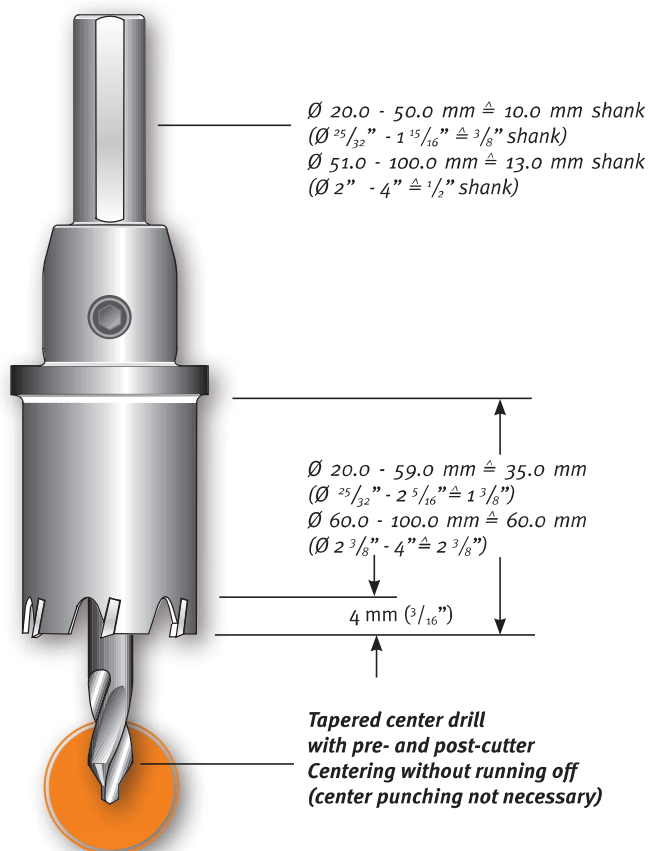


Features:

- Especially developed for the use on pipes, vaulted materials, for unalloyed and alloyed steels, nonferrous metals, plastics as well as glass fibre reinforced plastic.
- For material thickness up to 4 mm (3/16"), 2 mm (1/16") stainless steel.
- For use on hand drilling machines, recommended up to max. $\varnothing 40 \text{ mm}$ (1-9/16") or stationary machines.

Tips:

- Start drilling operation with light pressure, when drilling pipes. Avoid pendulum motions.
- Keep in mind: Always wear safety goggles.

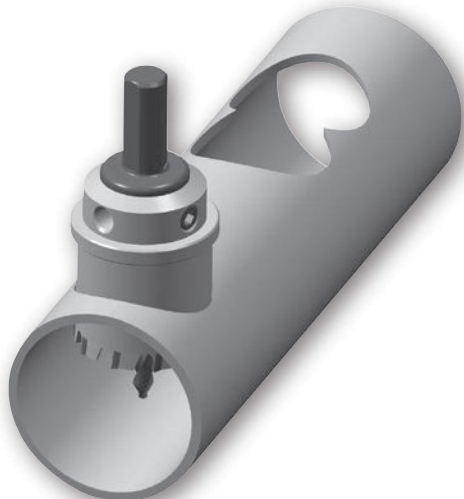

Special tools for special applications on request!



ALFRA TGT-HOLE SAWS – LONG TYPE




Made in Germany by ALFRA

Ø mm	Ø Inches	No. of teeth	Prod.-No. mm
Ø 16.0	5/8"	4	0700160
Ø 17.0		4	0700170
Ø 18.0	11/16"	4	0700180
Ø 19.0	3/4"	4	0700190
Ø 20.0		5	0700200
Ø 21.0	13/16"	5	0700210
Ø 22.0		5	0700220
Ø 23.0	7/8"	5	0700230
Ø 24.0	15/16"	6	0700240
Ø 25.0		6	0700250
Ø 26.0	1"	6	0700260
Ø 27.0	1-1/16"	6	0700270
Ø 28.0		6	0700280
Ø 29.0	1-1/8"	6	0700290
Ø 30.0	1-3/16"	6	0700300
Ø 31.0		8	0700310
Ø 32.0	1-1/4"	8	0700320
Ø 33.0		8	0700330
Ø 34.0	1-5/16"	8	0700340
Ø 35.0	1-3/8"	8	0700350
Ø 36.0		8	0700360
Ø 37.0	1-7/16"	8	0700370
Ø 38.0		8	0700380
Ø 39.0	1-1/2"	8	0700390
Ø 40.0	1-9/16"	10	0700400
Ø 41.0		10	0700410
Ø 42.0	1-5/8"	10	0700420
Ø 43.0	1-11/16"	10	0700430
Ø 44.0		10	0700440
Ø 45.0	1-3/4"	10	0700450
Ø 46.0		10	0700460
Ø 47.0	1-13/16"	10	0700470
Ø 48.0	1-7/8"	10	0700480
Ø 49.0		10	0700490
Ø 50.0	1-15/16"	12	0700500
Ø 51.0	2"	12	0700510
Ø 52.0		12	0700520
Ø 53.0	2-1/16"	12	0700530

Ø mm	Ø Inches	No. of teeth	Prod.-No. mm
Ø 54.0	2-1/8"	12	0700540
Ø 55.0		12	0700550
Ø 56.0	2-3/16"	12	0700560
Ø 57.0	2-1/4"	12	0700570
Ø 58.0		12	0700580
Ø 59.0	2-5/16"	12	0700590
Ø 60.0	2-3/8"	14	0700600
Ø 61.0		14	0700610
Ø 62.0	2-7/16"	14	0700620
Ø 63.0		14	0700630
Ø 64.0	2-1/2"	14	0700640
Ø 65.0		14	0700650
Ø 66.0	2-9/16"	14	0700660
Ø 67.0	2-5/8"	16	0700670
Ø 68.0		16	0700680
Ø 69.0	2-11/16"	16	0700690
Ø 70.0	2-3/4"	16	0700700
Ø 71.0		16	0700710
Ø 72.0	2-13/16"	16	0700720
Ø 73.0	2-7/8"	16	0700730
Ø 74.0	2-15/16"	16	0700740
Ø 75.0		16	0700750
Ø 76.0	3"	18	0700760
Ø 77.0		18	0700770
Ø 78.0	3-1/16"	18	0700780
Ø 79.0	3-1/8"	18	0700790
Ø 80.0		18	0700800
Ø 81.0	3-3/16"	18	0700810
Ø 82.0		18	0700820
Ø 83.0	3-1/4"	18	0700830
Ø 84.0	3-5/16"	20	0700840
Ø 85.0		20	0700850
Ø 86.0	3-3/8"	20	0700860
Ø 87.0	3-7/16"	20	0700870
Ø 88.0		20	0700880
Ø 89.0	3-1/2"	20	0700890
Ø 90.0	3-9/16"	20	0700900
Ø 91.0		20	0700910

Ø mm	Ø Inches	No. of teeth	Prod.-No. mm
Ø 92.0	3-5/8"	20	0700920
Ø 93.0		20	0700930
Ø 94.0	3-11/16"	22	0700940
Ø 95.0	3-3/4"	22	0700950
Ø 96.0		22	0700960
Ø 97.0	3-13/16"	22	0700970
Ø 98.0	3-7/8"	22	0700980
Ø 99.0		22	0700990
Ø 100.0	3-15/16"	22	0701000

HSS-Spare Drill with tapered center tip



von Ø 20.0 - 59.0	Ø 6x80 mm	0702680
von Ø 60.0 - 100.0	Ø 8x100 mm	0702800

MT Arbors



MT-2 (ab Ø 31.0)	0734002
MT-3 (ab Ø 31.0)	0734003

SDS Arbor



SDS arbor shank (for use with Ø 31 - 59 mm)	060sds6
--	---------

HIGHLY RECOMMENDED ACCESSORIES – COOLANT AND LUBRICANT!

ALFRA 2000

ALFRA 2000 is a fully synthetic cutting oil, developed for high-quality cutting, threading and drilling of metals of any degree of hardness, ferrous metal, steel alloys, stainless steel, copper, aluminium and their alloys.

ALFRA BIO 2000 is free of hydrocarbon, sulphur and chlorine.



ALFRA 3000

Universal metal working oil free of chlorine. High-performance drilling, broaching and cutting fluid, petroleum-based, for moderately difficult and difficult to cut steels. With a high proportion of active ingredients to ensure optimum cutting performance and significantly reduced tool wear. It meets occupational health and safety requirements.

We recommend to use ALFRA 3000 especially for the drilling and threading of high-alloy steel and chrome nickel steel.



ALFRA 4000

Suitable for core drilling applications with ALFRA cutters. Also ideal for twist drilling, thread tapping, reaming, countersinking, and difficult cutting applications. It meets to the requirements of work hygiene and safety.

ALFRA 4000 is a pump spray, free from propellant gas ideal for drilling and tapping of high-alloy, stainless steels; chromium nickel steels; titanium and manganese-carbon steels



	Prod.-No.
Aerosol can 405 ml	21010
5 ltr. Plastic container	21012
60 ltr. Barrel	21021

	Prod.-No.
Aerosol can 520 ml	21030
5 ltr. Plastic container	21031
60 ltr. Barrel	21032

	Prod.-No.
Aerosol can 300 ml	21040