



inserts:	page:
CDD ..... 42 poles + ⊕	69
CDS ..... 18 poles + ⊕	79
CSH ..... 10 poles + ⊕	92
CNE, CSE ..... 10 poles + ⊕	105
CCE ..... 10 poles + ⊕	111
CSS ..... 10 poles + ⊕	123
CT, CTSE (16A) *) .. 10 poles + ⊕	131
CQE ..... 18 poles + ⊕	139
CMCE ..... 3+2 (aux) poles + ⊕	148
CMSH ..... 3+2 (aux) poles + ⊕	149
CX ..... 8/24 poles + ⊕	169
MIXO ..... 3 modules	179 - 215

\*) can be used only in bulkhead mounting housings

insert centre distance:  
57 x 27 mm

bulkhead mounting housings  
with 2 levers or 4 pegs




bulkhead mounting housings  
with single lever



description	part No.	part No.
with one or two levers	CHI 10	CHI 10 L
with pegs <sup>1)</sup>	CHI 10 C	
with pegs and aluminum cover <sup>1)</sup>	CHI 10 CS	
with pegs and plastic cover <sup>1)</sup>	CHI 10 CP	
with lever and cover		CHI 10 LS

<sup>1)</sup> may be combined with enclosures:  
- CHO/CAO 10 X and CHV/CAV 10 X  
- MHO/MAO 10 X and MHV/MAV 10 X


panel cut-out for bulkhead mounting housings in mm




**NB:**  
The enclosures ensure IP66 protection (or IP65 for hinged cover versions) rating when mated and locked with the closing levers.  
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

dimensions in mm


CHI

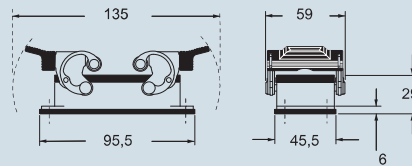

CHI C




CHI CS/CP

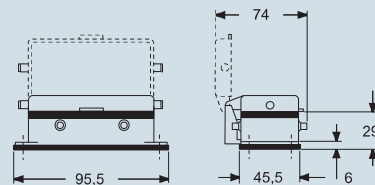


dimensions in mm

CHI L

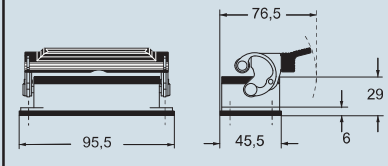

CHI LS

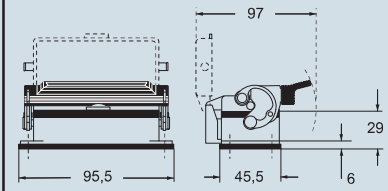

ANGLED VERSION



page 469

**ILME**® Type  
4/4X/12  
(except enclosures with plastic cover)



dimensions shown are not binding  
and may be changed without notice

C-TYPE - size 57.27