



inserts:		page:
CDD .....	42 poles + ⊕	69
CDS .....	18 poles + ⊕	79
CSH .....	10 poles + ⊕	92
CNE, CSE .....	10 poles + ⊕	105
CCE .....	10 poles + ⊕	111
CSS .....	10 poles + ⊕	123
CQE .....	18 poles + ⊕	139
CMCE .....	3+2 (aux) poles + ⊕	148
CMSH .....	3+2 (aux) poles + ⊕	149
CX .....	8/24 poles + ⊕	169
MIXO .....	3 modules	179 - 215

insert centre distance:  
57 x 27 mm

hoods with 2 levers



hoods with 1 lever




description	part No.		part No.		part No.		part No.	
	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M
with levers and gasket, top entry	16	25	16	25	16	25	16	25
with levers and gasket, top entry, high construction	21	25	21	25	21	25	21	25
with levers and gasket, top entry, high construction	29	32	29	32	29	32	29	32
with levers and gasket, top entry, high, without adapter *	21	25	21	25	21	25	21	25
with levers and gasket, top entry, high, without adapter *	29	32	29	32	29	32	29	32

\* enclosure without adaptor, threaded on the body, to be used only with a complete cable gland.


dimensions in mm

CHV G (CAV G) and [CFV G],  
MHV G (MAV G) and [MFV G]

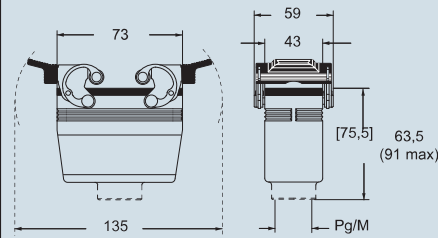

dimensions in mm

CHV LG (CAV LG) and [CFV LG],  
MHV LG (MAV LG) and [MFV LG]

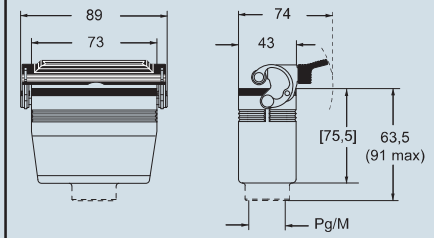

C-TYPE - size 57.27

CRUS® Type 4/4X/12



dimensions shown are not binding and may be changed without notice