


■ FEATURES

- ◆ SMALL SIZE
- ◆ BEAUTIFUL STYLE
- ◆ HIGH VOLUME

■ MODEL DESIGNATION





■ SPECIFICATIONS

- ◆ Dielectric Strength:
 - AC 1500V for duration of one minute
- ◆ Insulation Resistance : Over 100 mΩ @ DC 500 V
- ◆ Service life : Over than 30 minutes (Continue)
- ◆ Volume (D, B)
 - TBN-220, TBY-220 series : Over than 85 D.B.
 - TBY-302 Series : Over than 75 D.B.
 - 4BL-220 Series : Over than 95 D.B.



Designation	Signal	Description
1. Type	TBN	Flush Mounting
	TBY	Surface Mounting
	4BL	4" Bell
2. Voltage	110	110 V
	220	220 V
	24	24 V
	12	12 V
	301	110 V 30m/m
	302	220 V 30m/m
	312	12 V
	324	24 V
3. Current	(NONE)	AC
	D	DC

■ DIMENSIONS


TBY-302 30 mm 220V 220V, 110V @ n/a
 TBY-324D 24V @ n/a
 TBY-312D 12V @ n/a

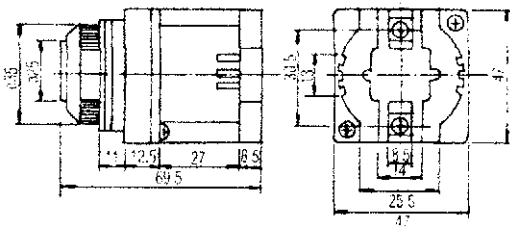

TBY-220 60 mm 220V 220V, 110V @ n/a
 TBY-24D 24V @ n/a
 TBY-12D 12V @ n/a

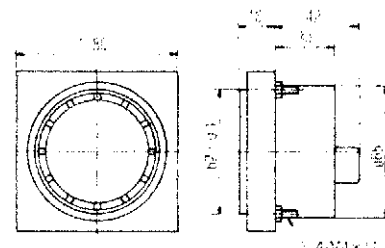

TBN-220 220V, 110V @ n/a
 TBN-24D 24V @ n/a
 TBN-12D 12V @ n/a

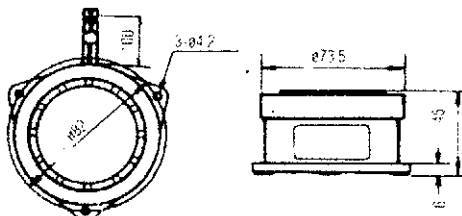

4BL-220 @ n/a
 4BL-24D (24 VDC) @ n/a

