

> CABLE GLANDS WITH DEVICE TO PREVENT ANY UNSCREWING



> REFERENCE STANDARDS

EN 50262 Metric cable glands for electric installations

> VERSIONS

	With nut - PG thread - METRIC thread - GAS thread
--	--

	Without nut - PG thread - METRIC thread
--	---

	With diaphragm and nut - PG thread - METRIC thread
--	--

	With diaphragm without nut - PG thread - METRIC thread
--	--


> TECHNICAL CHARACTERISTICS

Protection degree:	IP66 - IP68
Operating temperature:	-5°C+60°C
Glow Wire test:	750°C/850°C
Material:	Engineering plastic
IK degree at 20°C:	IK06 - IK09
Versions:	PG thread METRIC thread GAS thread
Colour:	Grey RAL 7035 (light) Grey RAL 7004 (heavy duty)

> BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Not Resistant	Not Resistant	Limited Resistance	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

> CABLE GLAND TABLE: METRIC/PG/GAS

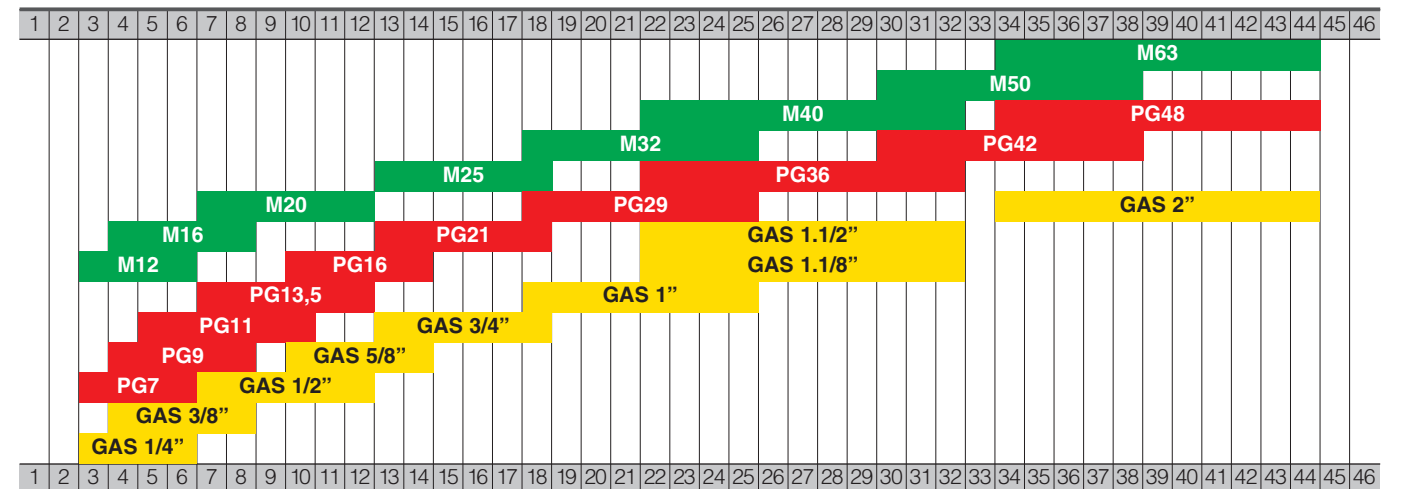

> APPLICATION EXAMPLES



> BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS (LIGHT VERSION)

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Limited Resistance	Limited Resistance	Resistant	Resistant	Resistant	Resistant