






# Fascette per identificazione

## Identification cable ties

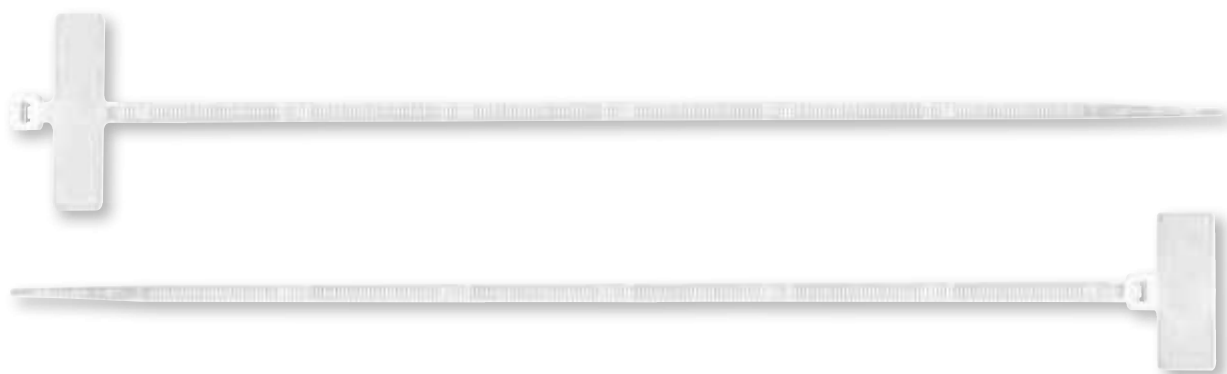

Materiale: Poliammide 6.6 UL94-V2  
 Temperatura d'esercizio: - 40°C + 85°C  
 Temperatura di montaggio: - 10°C + 60°C  
 Resistenza al calore: + 110 °C

Material: Polyamide 6.6 UL94-V2  
 Working temperature: - 40°C + 85°C  
 Mounting temperature: - 10°C + 60°C  
 Heat resistance: + 110 °C

Articolo Item	Dimensioni Dimensions	Dimensioni targhetta Plate dimensions	Tipo targhetta Plate type
<b>FT10025</b>	100 x 2,5 mm	25 x 8 mm	
<b>FT20025</b>	200 x 3,6 mm	25 x 8 mm	
<b>FTS10025</b>	110 x 2,5 mm	20 x 9 mm	
<b>FTS20025</b>	210 x 3,6 mm	20 x 9 mm	



La targhetta articolo **FTS1550** può essere usata con tutte le fascette di larghezza 2,5 mm. La dimensione della targhetta è 50x15 mm

The plate item **FTS1550** can be used with every cable tie of 2,5 mm of width. The dimension of the plate is 50x15 mm