

Certification	Case Material	Protection class	Order Code
CE RoHS	ABS	IP20	2021.004


A thermostat with two temperature settings.

Normally Open contact: commonly used in the monitoring filter fans, heat exchangers, or when the temperature exceeds the set value, the closed circuit output signal.

Normally Closed contact: commonly used in connecting the heater, when the temperature reaches the set value, the broken line.



Dimensions

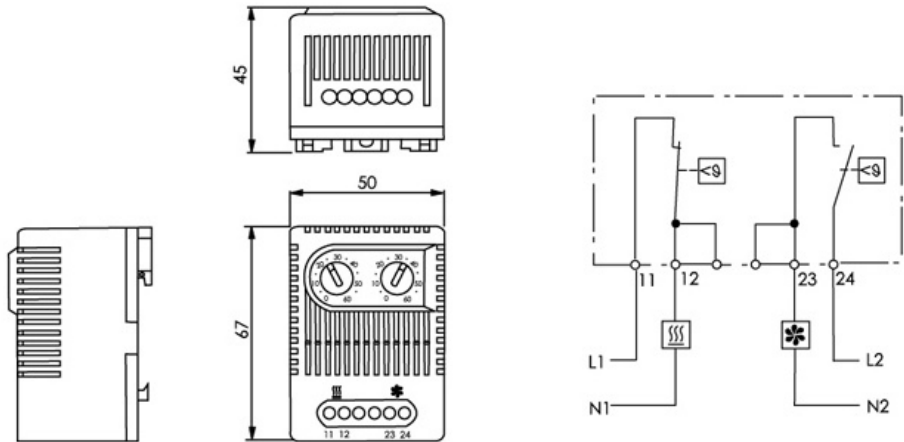

Technical data

Temperature range	0-60°C
Switching temperature tolerance	7K (± 4K)
Sensing element	Bimetallic
Maximum switching capacity	250VAC, 10 (2) A / 120VAC, 15 (2) A / DC 30W
Electrical connection	4-pole 2.5mm, 0.8Nm
Installation	35mm DIN rail mounting
Terminal	UL94V0
Weight	90g
Size	69X50X46mm
Operating / storage areas	-5°C to +80°C