



JOINTS

GEL CONNECTION

Micro-joints IPX8



Electrical performance:
CEI EN 50393 with connectors complying with EN 61238-1 (with testing under water head and water between the cable cores)
Class 2 in accordance with CEI 64-8.

Gel: UL 94-HB

Operating temperature

Installation temperature: -40°C / +50°C


IPX8 OFFICIALLY TESTED | **IMQ**

LV


Gel Cover Line

Pre-filled gel accessories for straight connections, for the protection, safety and covering of electrical connections using strip connectors or alternatives.

- For 3 x 1 to 6 mm² cables or 3 insulated wires
- For civil and industrial connections
- To put household systems in order
- Also for underwater use
- Non-toxic and with no shelf life
- Halogen free
- UV resistant

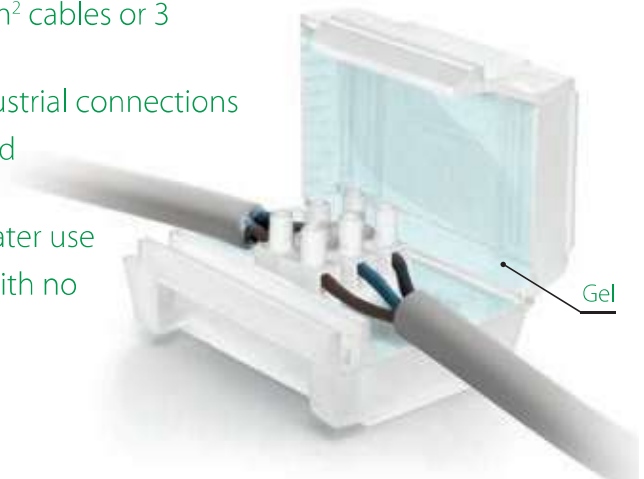


OHM & BAR



Product	Housed connectors type	Pieces for package	Package type	Dimensions A x B x C (mm)
OHM	2 from 4 mm ²	1	Blister	61 x 35 x 28
OHMp11		11	Box	
BAR	3 from 4 mm ² / 6 mm ²	1	Blister	63 x 41 x 28
BARp9		9	Box	



Mammut Gel Cover



Product	Housed connectors type	Pieces for package	Package type	Dimensions A x B x C (mm)
Gel Cover 4	2 from 4 mm ²	1	Blister	61 x 35 x 28
Mammut Gel Cover		8	Box	
Gel Cover 6	3 from 4 mm ² / 6 mm ²	1	Blister	63 x 41 x 28
Mammut Gel Cover 6		6	Box	

No flame propagation. CEI 20-35 • IEC 60332-1 • HD405-1 (as applicable). **Casing mix:** UL 94-V2



Installation examples

