


# Product data sheet

Specifications

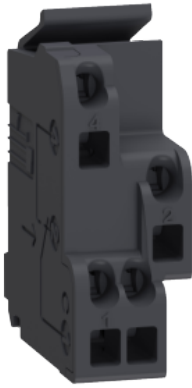

standard auxiliary contact, circuit breaker status OF/SD/SDE/SDV, 1 changeover contact type, screwless spring terminals

29450

## Main

Product or component type	Auxiliary contact
Device short name	OF SD SDE SDV
Device application	Breaker status monitoring
Range compatibility	ComPact (ComPact NS630b...1600) ComPact (ComPact NS1600b...3200) ComPact (ComPactT INS) ComPact (Compact INV) ComPact (ComPact NSX) EasyPact (EasyPact CVS) PowerPact (PowerPact Multistandard) ComPact (ComPact NSX DC)
Signal contacts composition	1 NO/NC

## Complementary

Fault type	General electric fault
Local signalling	ON/OFF indication for open/close Trip indicator for relay trip indicator Fault trip for electrical fault
Auxiliary contacts type	Standard
Mounting mode	Clip-on
[I <sub>th</sub> ] conventional free air thermal current	5 A
Breaking capacity (A)	AC-12: 6 A at 24 V AC 50/60 Hz AC-12: 6 A at 48 V AC 50/60 Hz AC-12: 6 A at 110 V AC 50/60 Hz AC-12: 6 A at 220/240 V AC 50/60 Hz AC-12: 6 A at 380/440 V AC 50/60 Hz AC-12: 6 A at 480 V AC 50/60 Hz AC-12: 6 A at 660/690 V AC 50/60 Hz AC-15: 6 A at 24 V AC 50/60 Hz AC-15: 6 A at 48 V AC 50/60 Hz AC-15: 5 A at 110 V AC 50/60 Hz AC-15: 4 A at 220/240 V AC 50/60 Hz AC-15: 2 A at 380/440 V AC 50/60 Hz AC-15: 1.5 A at 480 V AC 50/60 Hz AC-15: 0.1 A at 660/690 V AC 50/60 Hz DC-12: 6 A at 24 V DC 50/60 Hz DC-12: 2.5 A at 48 V DC 50/60 Hz DC-12: 0.6 A at 110 V DC 50/60 Hz DC-12: 0.3 A at 250 V DC 50/60 Hz DC-14: 1 A at 24 V DC 50/60 Hz DC-14: 0.2 A at 48 V DC DC-14: 0.05 A at 110 V DC DC-14: 0.03 A at 250 V DC
Minimum load	100 mA at 24 V DC

<b>Auxiliary connection terminal</b>	Spring 0.5...1.5 mm <sup>2</sup> (AWG 20...AWG 16)
<b>Accessory / separate part category</b>	Spare part for Compact NS630b...1600 Spare part for Compact NS1600b...3200

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	1.400 cm
<b>Package 1 Width</b>	7.000 cm
<b>Package 1 Length</b>	7.000 cm
<b>Package 1 Weight</b>	17.000 g
<b>Unit Type of Package 2</b>	BB1
<b>Number of Units in Package 2</b>	10
<b>Package 2 Height</b>	4.500 cm
<b>Package 2 Width</b>	16.000 cm
<b>Package 2 Length</b>	16.000 cm
<b>Package 2 Weight</b>	178.000 g
<b>Unit Type of Package 3</b>	S03
<b>Number of Units in Package 3</b>	300
<b>Package 3 Height</b>	30.000 cm
<b>Package 3 Width</b>	30.000 cm
<b>Package 3 Length</b>	40.000 cm
<b>Package 3 Weight</b>	5.765 kg

## Offer Sustainability

<b>Sustainable offer status</b>	Green Premium product
<b>REACH Regulation</b>	<a href="#">REACH Declaration</a>
<b>REACH free of SVHC</b>	Yes
<b>EU RoHS Directive</b>	Compliant <a href="#">EU RoHS Declaration</a>
<b>Toxic heavy metal free</b>	Yes
<b>Mercury free</b>	Yes
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>
<b>WEEE</b>	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
<b>PVC free</b>	Yes
<b>Halogen content performance</b>	Halogen free plastic parts product

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Recommended replacement(s)