


# Product data sheet

Specifications

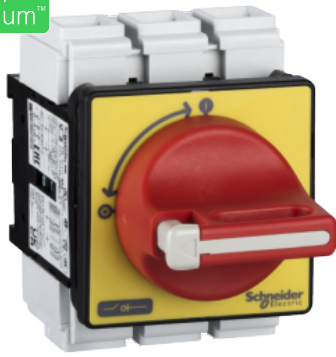

## TeSys Vario - emergency stop switch disconnecter - 63 A - on door

VCF3

### Main

Range	TeSys
Product Name	TeSys VARIO
Device Short Name	VCF
Product Type	Emergency stop switch disconnecter

### Complementary

Device Composition	Switch Handle
Mounting Support	Handle: door Switch: door
Mounting Method	By 4 screws for handle
Performance Level	High performance
Number of Poles	3P
Contact Type and Composition	3 NO
[Ue] IEC Rated Operational Voltage	690 V AC 50/60 Hz
IEC Rated Operational Power in W	11 kW at 230...240 V (AC-3) 22 kW at 500 V (AC-3) 22 kW at 690 V (AC-23A) 30 kW at 500 V (AC-23A) 18.5 kW at 400...415 V (AC-3) 18.5 kW at 690 V (AC-3) 15 kW at 230...240 V (AC-23A) 22 kW at 400...415 V (AC-23A)
[Ie] Rated Operational Current	41.5 A AC-23 Ue: 400 V
[Ith] Conventional Free Air Thermal Current	63 A
[Ithe] Conventional Enclosed Thermal Current	50 A
Making Capacity ( I Rms)	630 A at 400 V AC-21A 630 A at 400 V AC-22A 630 A at 400 V AC-23A
Breaking Capacity	500 A at 400 V (AC-21A) 500 A at 400 V (AC-22A) 500 A at 400 V (AC-23A)
Rated Conditional Short Circuit Current	10 kA at 400 V - associated fuse 63 A aM 10 kA at 400 V - associated fuse 63 A gG
[Icm] Rated Short Circuit Making Capacity	2.1 kA at 400 V at Ipeak

<b>[Icw] Rated Short Time Withstand Current</b>	756 A at 400 V duration: 1 s
<b>[Uimp] Rated Impulse Withstand Voltage</b>	8 kV
<b>Suitability for Isolation</b>	Yes
<b>Network Type</b>	DC AC
<b>Intermittent Duty Class</b>	30
<b>Control Type</b>	Rotary handle
<b>Rotary Handle Mounting Style</b>	Direct
<b>Handle Color</b>	Red
<b>Handle Front Plate Color</b>	Yellow
<b>Rotary Handle Padlocking</b>	1 to 3 padlocks 4...8 mm
<b>Marking</b>	0 - 1
<b>Mechanical Durability</b>	30000 cycles
<b>Electrical Durability</b>	30000 cycles AC-21 30000 cycles DC-1...5
<b>IEC Terminal Connection</b>	Power circuit: screw clamp terminals25 mm <sup>2</sup> - solid Power circuit: screw clamp terminals16 mm <sup>2</sup> - flexible - with cable end
<b>Tightening Torque</b>	Power circuit: 4 N.m - on screw clamp terminals
<b>Base Dimension</b>	60 x 60 mm
<b>Height</b>	83 mm
<b>Width</b>	60 mm
<b>Product Weight</b>	0.56 kg

## Environment

<b>Standards</b>	IEC 60947-3
<b>Product Certifications</b>	GL CCC CSA UL UKCA
<b>Degree of Protection</b>	IP20 conforming to IEC 60529 IP65
<b>Protective Treatment</b>	TC
<b>Mechanical Robustness</b>	Vibrations 10...150 Hz (1 gn) conforming to IEC 60068-2-6 Shocks 11 ms (30 Gn) conforming to IEC 60068-2-27
<b>Ambient Air Temperature for Operation</b>	-20...50 °C
<b>Fire Resistance</b>	960 °C conforming to IEC 60695-2-1
<b>Compatibility Code</b>	Main switch disconnector

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	7.800 cm
<b>Package 1 Width</b>	8.500 cm
<b>Package 1 Length</b>	11.800 cm
<b>Package 1 Weight</b>	349.000 g
<b>Unit Type of Package 2</b>	S02

Number of Units in Package 2	12
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	4.422 kg
Unit Type of Package 3	P06
Number of Units in Package 3	192
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	81.060 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes
California proposition 65	WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

## Contractual warranty

Warranty	18 months
----------	-----------

## Recommended replacement(s)