

Terminal, screw terminal, PE/PEN terminal, 6 mm<sup>2</sup>, green-yellow



Model	
product brand name	SENTRON
product designation	ALPHA FIX terminal blocks
design of the product	PE through-type terminal
General technical data	
insulation material	thermoplastic
terminal contact spacing	8 mm
Protection class	
combustibility class according to UL 94	V0
Appearance	
color	miscellaneous
Product details	
product component required end cover plate	Yes
Number	
number of terminal levels	1
number of terminal points per terminal level	2
Connections	
stripped length	10 mm
connectable conductor cross-section solid	
• minimum	0.2 mm <sup>2</sup>
• maximum	10 mm <sup>2</sup>
connectable conductor cross-section stranded	
• minimum	10 mm <sup>2</sup>
• maximum	0.2 mm <sup>2</sup>
connectable conductor cross-section finely stranded	
• with core end processing minimum	0.25 mm <sup>2</sup>
• with core end processing maximum	6 mm <sup>2</sup>
• without core end processing minimum	0.2 mm <sup>2</sup>
• without core end processing maximum	10 mm <sup>2</sup>
tightening torque with screw-type terminals	
• minimum	1.5 N·m
• maximum	2 N·m
type of connection 1	screw-type terminal
type of connection 2	screw-type terminal
position of the terminal	lateral
Mechanical Design	
height	48 mm
height with lowest-profile installation	47.5 mm
depth	46.85 mm
length	48 mm

fastening method	TH35 DIN rail
net weight	23 g
material of the insulating body	Other
<b>Environmental conditions</b>	
ambient temperature during operation	
• minimum	-60 °C
• maximum	105 °C

**Approvals Certificates**

<b>General Product Approval</b>	<b>other</b>
---------------------------------	--------------



[Confirmation](#)



EG-Konf.



UL



[Confirmation](#)

<b>other</b>	<b>Environment</b>
--------------	--------------------

[Miscellaneous](#)

[Environmental Con-  
firmations](#)

**Further information**

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WH1000-0CH07>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WH1000-0CH07>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8WH1000-0CH07](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH1000-0CH07)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

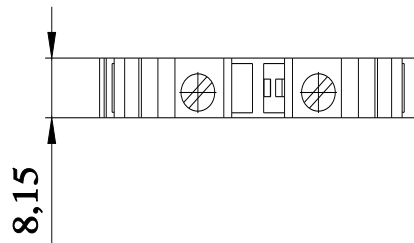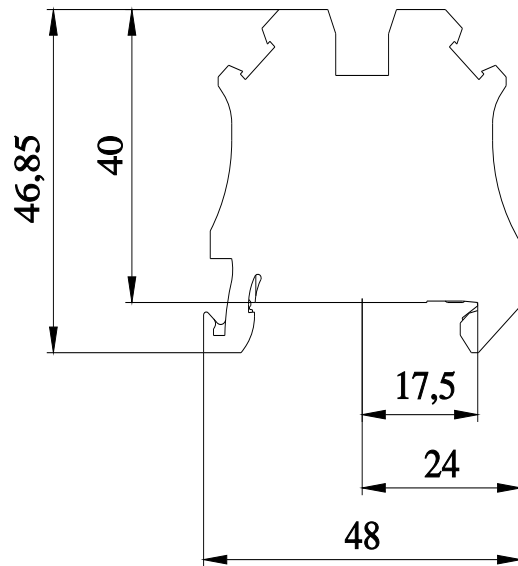

last modified:

3/12/2024 

