




Used for electrical connections with one or more copper conductors without cutting the main conductor.

This series has been designed to decrease the user's manipulation and increase safety of torque, avoiding deformations of metallic insert.

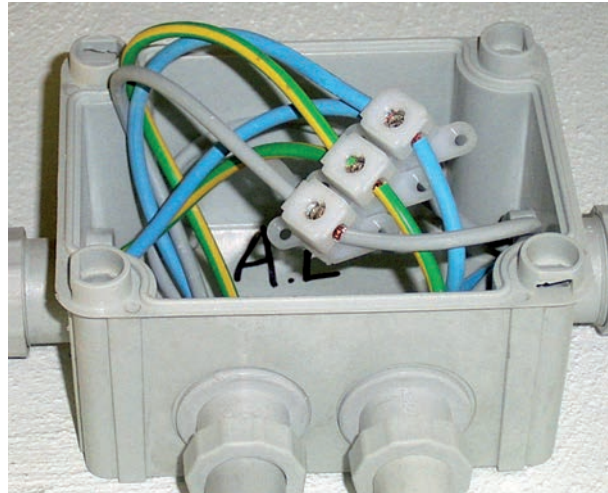

Raw materials:

Body: polyamide 6, natural colour. V2 (according to UL94).

Insert: nickel-plated brass.

Screws: nickel-plated brass. Metric thread.



Glow-wire test 960°C according to EN 60695-2-11

Technical features according to EN 60998 (types up to 35mm²) and EN 60947 (types from 50mm² on)



Types up to 35 mm² supplied in 12 ways easily divided by hand



Types 50 mm² and above: available with Allen screws



Captive screw integrated in the cover



HPS 6			100 pcs. 407x87x189 mm		7,7 Kg
SOLID CABLE 6 mm ² / 2,5 mm ²	0,8 Nm		M 5	12 ways	
FLEXIBLE CABLE 4 mm ² / 2,5 mm ²	Voltage 500V		Current rating 41A	110°C	


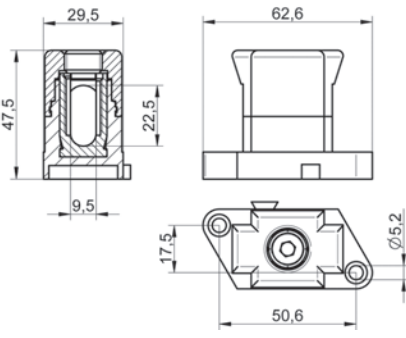











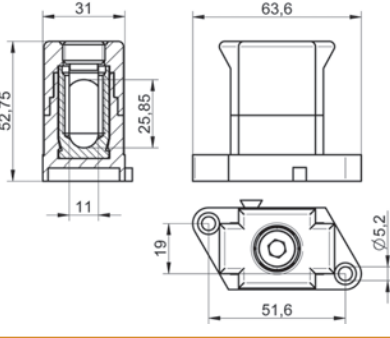











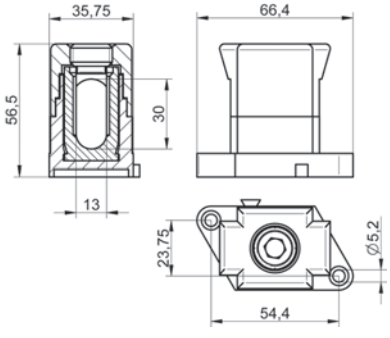











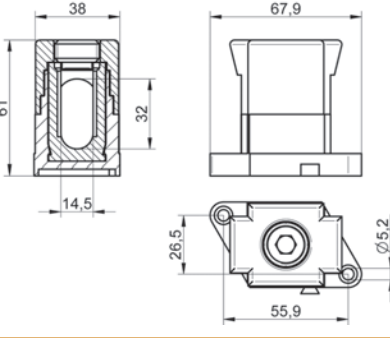





















HPS 10			100 pcs. 442x112x224 mm		14 Kg
SOLID CABLE 10 mm ² / 4 mm ²	1,2 Nm		M 6	12 ways	
FLEXIBLE CABLE 6 mm ² / 4 mm ²	Voltage 500V		Current rating 57A	110°C	

HPS 16			50 pcs. 312x102x262 mm		10,4 Kg
SOLID CABLE 16 mm ² / 6 mm ²	2,5 Nm		M 8	12 ways	
FLEXIBLE CABLE 10 mm ² / 4 mm ²	Voltage 500V		Current rating 76A	110°C	

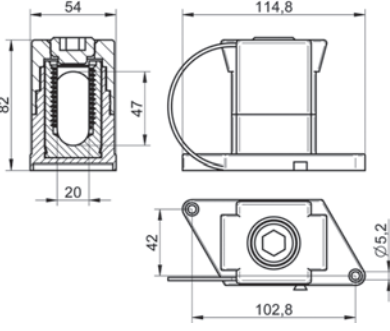HPS 25/35			20 pcs. 312x252x80 mm		8,8 Kg
SOLID CABLE 35 mm ² / 16 mm ²	2,5 Nm		M 12	12 ways	
FLEXIBLE CABLE 25 mm ² / 10 mm ²	Voltage 500V		Current rating 125A	110°C	

SERIES HPS

THE MORE RELIABLE AND SAFER CONNECTION

HPS 50 			 60 pcs. 235x235x96 mm	 4,5 Kg			
HPS 50/A   n°5							
 SOLID CABLE 50 mm ²	 FLEXIBLE CABLE 35 mm ²				 5 Nm	 M 14	 1 way
		Voltage 1000V	Current rating 150A	 110°C			
HPS 70 			 60 pcs. 235x235x104 mm	 5,4 Kg			
HPS 70/A   n°6							
 SOLID CABLE 70 mm ²	 FLEXIBLE CABLE 50 mm ²				 5,5 Nm	 M 16	 1 way
		Voltage 1000V	Current rating 192A	 110°C			
HPS 95 			 30 pcs. 271x237x58 mm	 3,7 Kg			
HPS 95/A   n°8							
 SOLID CABLE 95 mm ²	 FLEXIBLE CABLE 70 mm ²				 9 Nm	 M 18	 1 way
		Voltage 1000V	Current rating 232A	 110°C			
HPS 120 			 30 pcs. 285x262x62 mm	 5,3 Kg			
HPS 120/A   n°8							
 SOLID CABLE 120 mm ²	 FLEXIBLE CABLE 95 mm ²				 11 Nm	 M 20	 1 way
		Voltage 1000V	Current rating 269A	 110°C			
HPS 150/A   n°14			 4 pcs. 260x170x120 mm	 1,8 Kg			
 SOLID CABLE 150 mm ²	 FLEXIBLE CABLE 120 mm ²				 50 Nm	 M 28	 1 way
					Voltage 1000V	Current rating 309A	 110°C